
COR10110




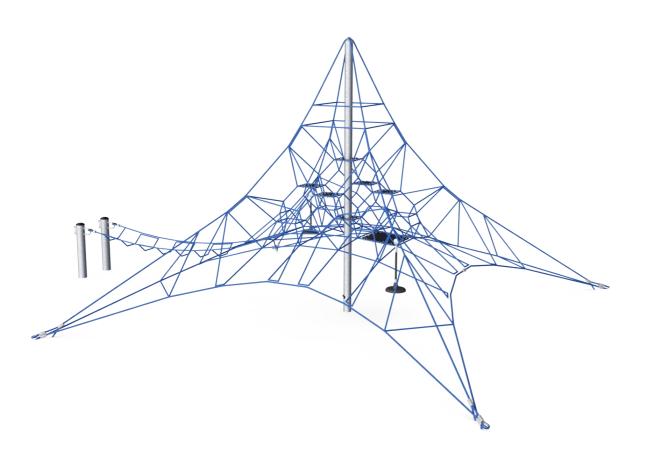


The Mini Spacenet with Bridge is a bouncy, transparent play structure that encourages children to climb to the top. The feeling of achievement when having climbed to the top is phenomenal, attracting children again and again trying different routes each time. Climbing or swaying in the bouncy net with pendulum seats is challenging and immensely

fun. The Mini Spacenet trains the motor skills' ABC: Agility, Balance and Coordination. Major muscle groups are used when children climb, including; arms push and pull, legs push and the core provides stability.

Item no. COR101101-1102			
General Product Information			
Dimensions LxWxH	800x600x385 cm		
Age group	3+		
Play capacity (users)	28		
Color options			






COR10110





Bouncy net meshes

Physical: agility, balance and coordination as well as spatial awareness are supported when bouncing, climbing and sitting in the net. Children use muscle strength of arms, legs and core, and build bone density when iumping down. Social-Emotional: the bouncing, swaying net appeals to empathy and cooperation. Cognitive: physical memory, logical thinking, concentration.

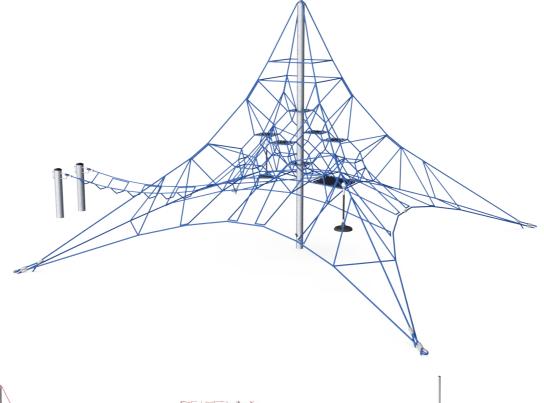



Membrane

Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. A faster way up, due to the extra support of the membrane. Social-Emotional: a meeting point for retreat from the rope landscape.



Waggle bridge

Physical: sense of balance and training of cross coordination. Important for other skills such as being able to sit still. Social-Emotional: turn-taking and helping others when climbing up.



Highest rungs

important life skills.



Physical: spatial awareness is supported,

Emotional: children develop courage, self-

confidence, consideration and turn-taking, all

arm muscles when holding tight. Social-





Sturdy, lower rungs

Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Hanging from the arms trains back and upper body muscles, supporting good posture. These are a growing concern for children due to sedentary lifestyles. Social-Emotional: great meeting point allowing socializing.



Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. Social-Emotional: children develop courage and self-regulation when climbing up high. This positively affects self-confidence.



Physical: swaying movement supports the sense of balance as well as core and arm muscles when holding tight. Social-**Emotional:** socializing and turn-taking when deciding who should sit here.

COR10110



120 cm

78.8 m²

6.16 m³

3.92 m³

110 cm

530 kg

In-ground

13.8



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



Warranty Information Corocord rope 10 years Membrane 2 years S-Clamps 10 years 10 years Spare parts guaranteed Steel post HDG Lifetime

Item no. COR101101-1102 Installation Information

Max. fall height

Safety surfacing area

Total installation time

Footing depth (standard)

Excavation volume

Concrete volume

Shipment weight

Anchoring options



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.



Through KOMPAN Variant Team, you can choose between additional 7 rope colours and customize your solution. The assortment is a wide span of colours ranking from elegant and expressive black or natural and toned-down hemp colour, to a range of attractive and eyecatching signal colours.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.



Sustainability Data

COR10110



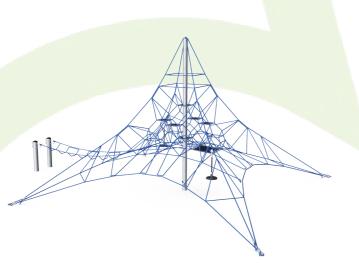

Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR101101-1102	1,279.73	3.08	51.74

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

miss

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


COR10110

KOMPAN Let's play

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

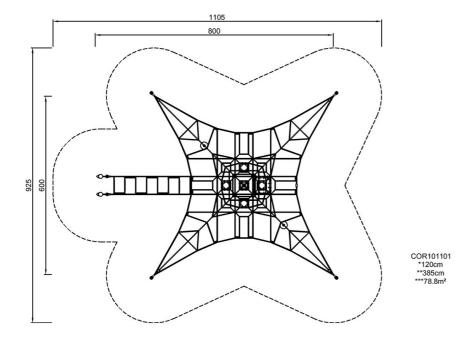

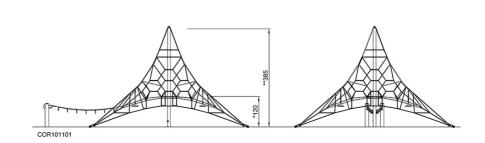

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

Click to see TOP VIEW

Click to see SIDE VIEW