

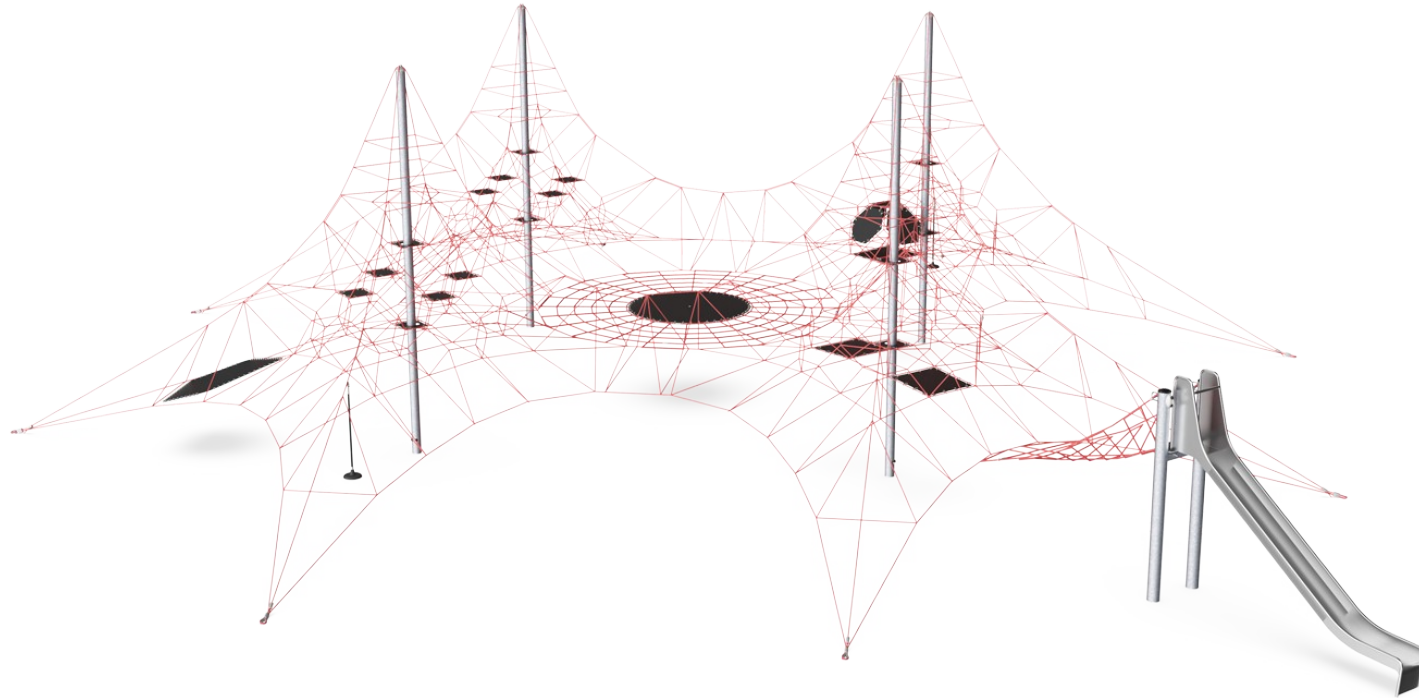


Four-mast Spacenet, Net & Slide

COR10420

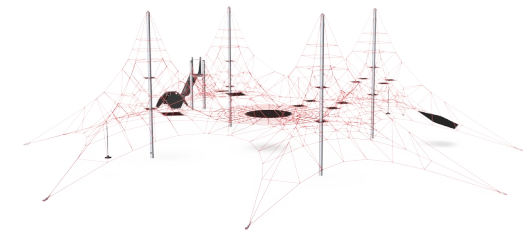

Item no. COR104201-1201	
General Product Information	
Dimensions LxWxH	2385x1902x580 cm
Age group	5+
Play capacity (users)	178
Color options	● ● ● ● ● ● ● ●

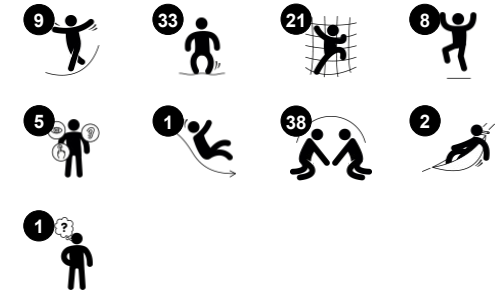

The amazing Four-Mast Spacenet & Bouncing Net has so many play opportunities from the top to the bottom. The structure will provide hours of physical and social activity that all help towards building a healthy lifestyle. The carefully designed features support the development of agility, balance and coordination as well as spatial awareness

when bouncing, climbing and sitting in the nets. These motor skills are fundamental for life skills such as managing traffic securely. The careful design of the nets is scaled to the size of children in this age group, maximizing play value. The integrated jumping membranes offer extra fun variety. In addition to the physical benefits, this is an incredibly enjoyable social

space. It will attract children and their parents, creating a space for healthy family fun and be a point of pride for communities.

Four-mast Spacenet, Net & Slide

COR10420



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The spacenets' main bearing ropes are equipped with an additional safety feature: should the main connections fail, the safety rope prevents collapse of the structure.

Item no. COR104201-1201	
Installation Information	
Max. fall height	200 cm
Safety surfacing area	349.0 m ²
Total installation time	59.8
Excavation volume	21.59 m ³
Concrete volume	13.70 m ³
Footing depth (standard)	110 cm
Shipment weight	2,615 kg
Anchoring options	In-ground ✓



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.



Sustainability Data

COR10420

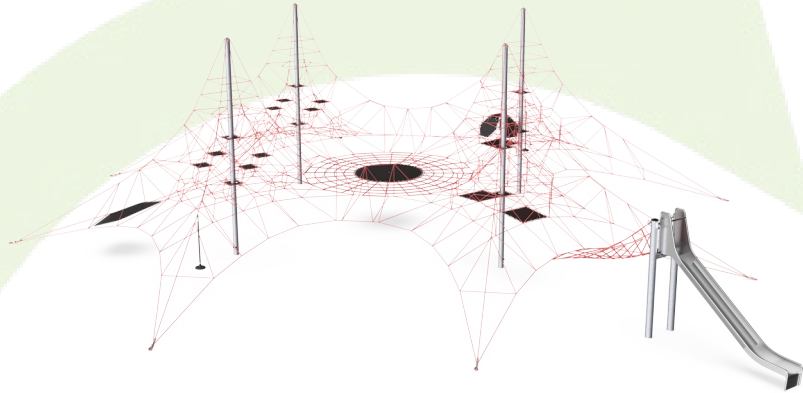

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR104201-1201	6,177.10	3.18	52.60

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





Four-mast Spacenet, Net & Slide

COR10420

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

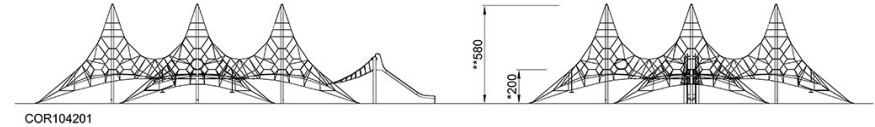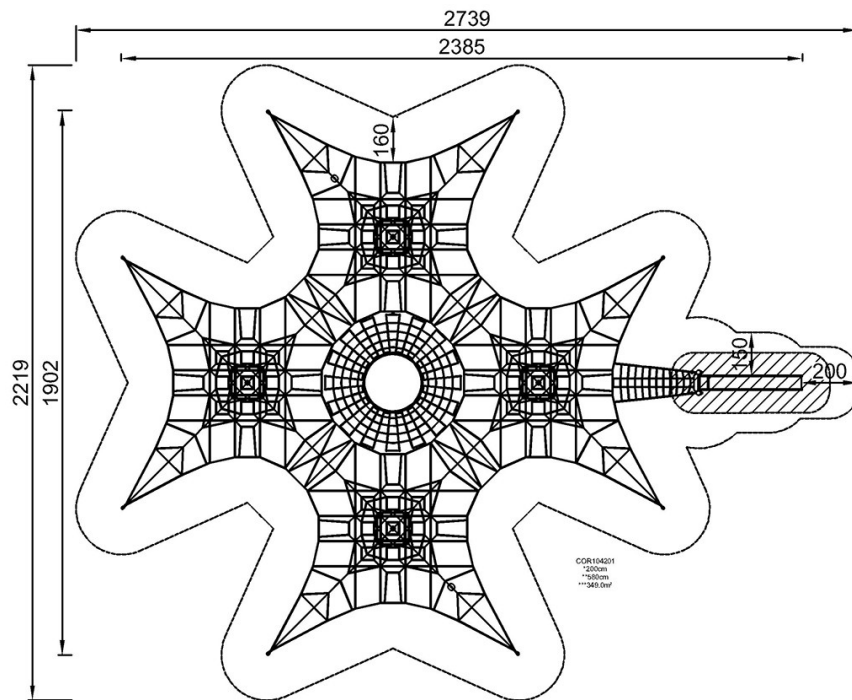

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)