


Item no. COR494801-0406	
General Product Information	
Dimensions LxWxH	604x604x639 cm
Age group	5+
Play capacity (users)	45
Colour options	

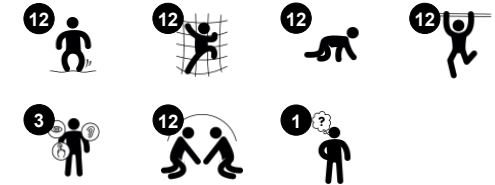

The Maxite offers a climbing experience in three-dimensional nets. The net cubes add fast, bouncy routes to the top and function as destinations and meeting point too. The top net is a popular destination and trains turn-taking skills and cooperation. The bouncy, interconnected nets make the child feel its own and all the friends' movements when using the



net which at this height means children have to concentrate and assess risk. The nets train important motor skills such as proprioception, spatial awareness and cross-body coordination which are fundamental skills for risk assessment when, for instance, judging and navigating traffic securely. All major muscle groups are trained thoroughly when the child

climbs the big meshes, holding on tight.




## Height

**Social-Emotional:** children develop courage and self-regulation when being up high. This positively affects self-confidence.

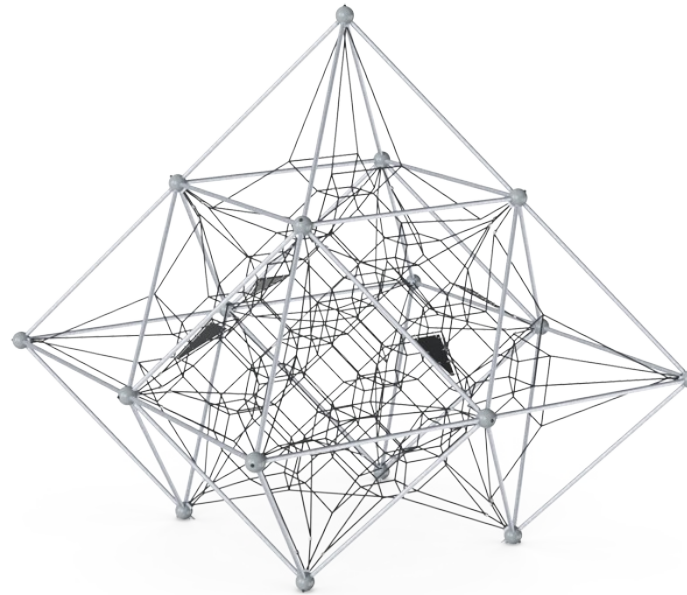

## Big meshes

**Physical:** the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. **Social-Emotional:** allow more children being seated together, sharing.



## Transparency

**Social-Emotional:** the transparency makes cooperation and communication possible, which are essential life skills for children to learn.



## Connected nets

**Physical:** the connected nets make the climbers feel the movements of the other climbers. All muscle groups are trained, as well as cross coordination. **Social-Emotional:** the climbers' movements affect the other climbers, so consideration and turn-taking is supported.

# Maxite


COR49480



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.




The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, to provide the best possible rope climbing experience.

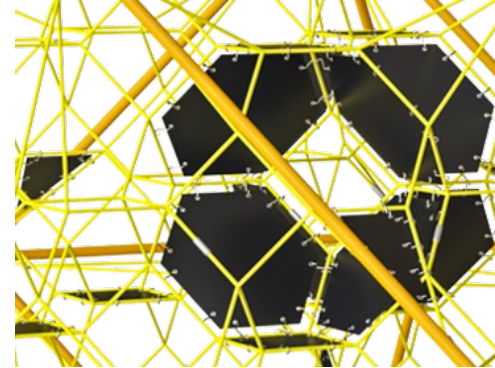

Corocord membranes consist of friction-proof rubberised material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



The steel struts are hot-dip galvanised inside and the outside finish is lead-free zinc. The galvanisation has excellent corrosion resistance in outdoor environments and requires low maintenance.

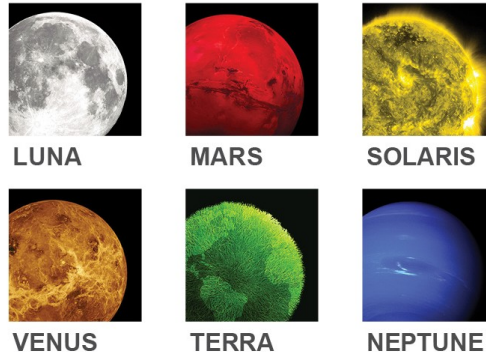

The COROCORD Frame Nets are available in 8 colour themes, ranging from elegant to expressive black or a natural neutral sand colour section to bright eye-catching signal colours which appeals to children of all ages.

Item no. COR494801-0406

### Installation Information

Max. fall height	227 cm
Safety surfacing area	96.0 m <sup>2</sup>
Total installation time	35.0
Excavation volume	5.76 m <sup>3</sup>
Concrete volume	3.46 m <sup>3</sup>
Footing depth (standard)	120 cm
Shipment weight	1,189 kg
Anchoring options	In-ground ✓


### Warranty Information

Corocord (Hercules) Rope	10 years
EcoCore HDPE	Lifetime
Galvanised Steel	Lifetime
S-Clamps	10 years
Spare Parts Guarantee	10 years

**AS**  
**4685**  
compliant

# Sustainability Data

COR49480

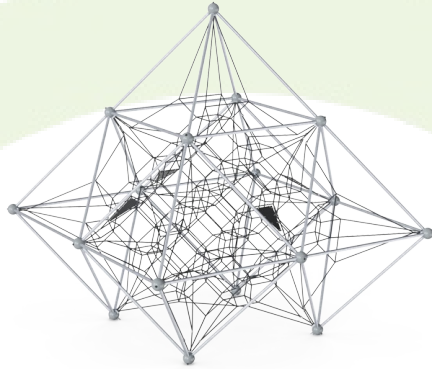

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>COR494801-0406</b>	3,531.72	3.81	39.81

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.



**Publication date: 30. October 2023**

**By Bureau Veritas HSE**  
 www.bureauveritas.dk  
 +45 7731 1000



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

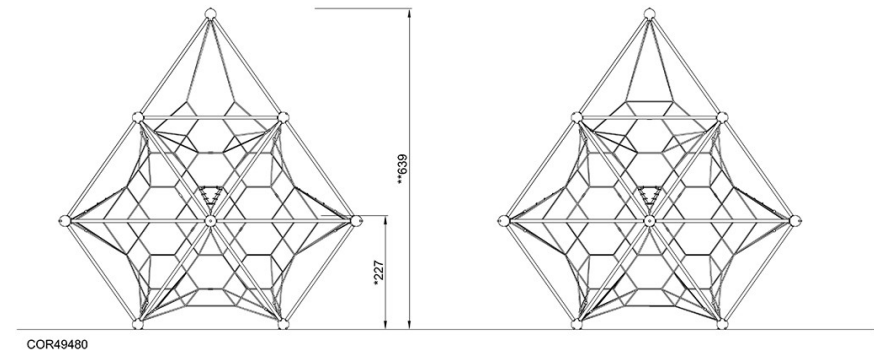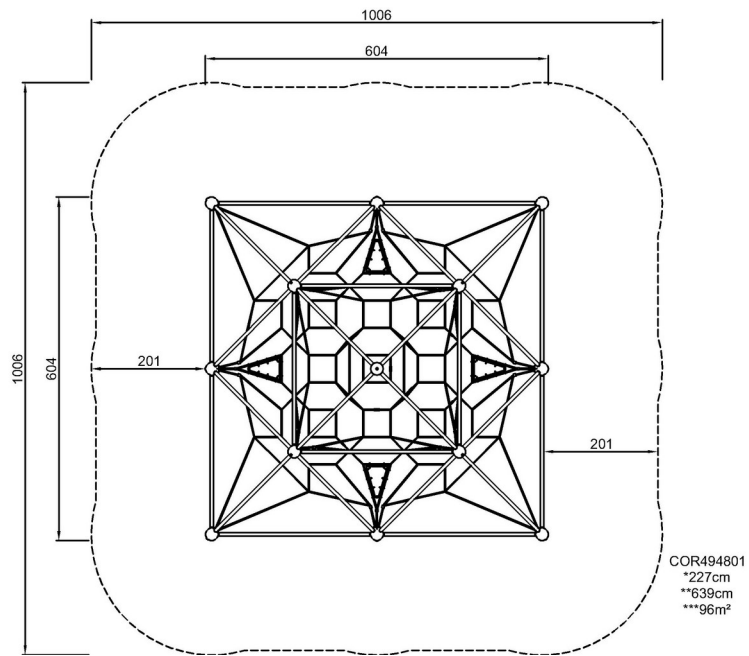

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)