

Treasure Island



COR10430

KOMPANI
Let's play

产品编号 COR104301-1005

产品信息概览


长宽高尺寸	1351x887x730 cm
适用年龄段	5+
容纳人数	41
颜色选择	

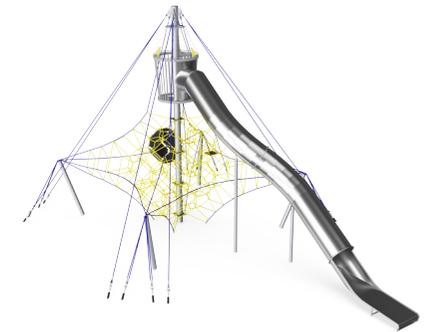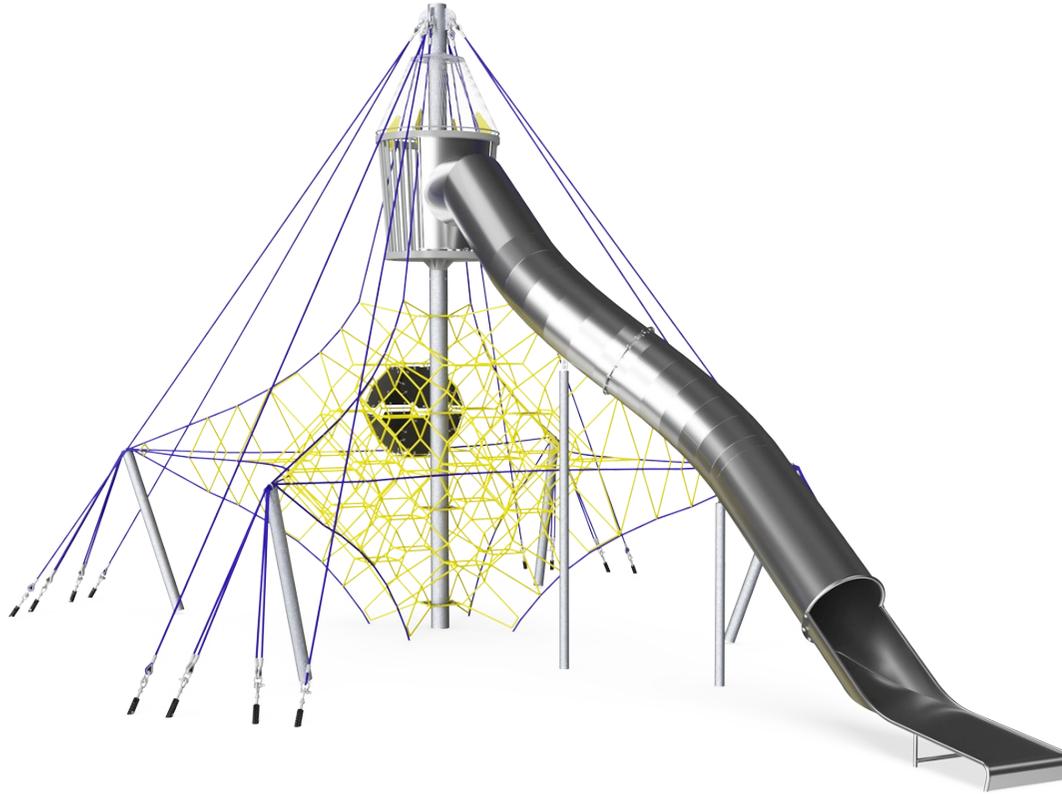

从瞭望台观察敌情、船只、新大陆，亦或转身钻进滑梯，体验别样的刺激。如果情况过于危险，可以藏在舒适的“小屋”中，等待暴风雨结束！


Treasure Island

COR10430

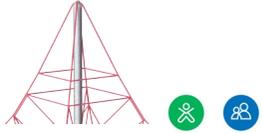

Highest rungs

身体素质：spatial awareness is supported, arm muscles when holding tight. **社交情感**：children develop courage, self-confidence, consideration and turn-taking, all important life skills.

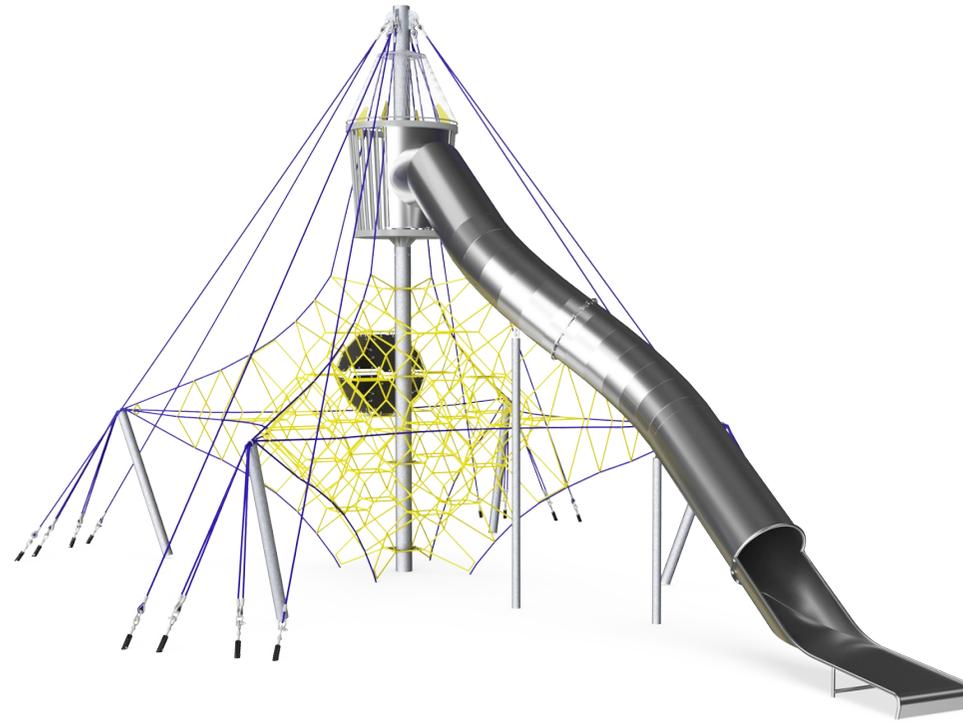

Sputnik

身体素质：平衡感、空间感、时间感和节奏感都会得到强化训练。 **社交情感**：sheltered meeting and resting point, stimulating social interaction. Room for more children to sit together and talk.




Big meshes

身体素质：这些大网眼可用于攀爬和爬行活动，发展本体感觉、交叉协调能力和空间意识。在这里攀爬需要肌肉力量，双臂推拉才能向上攀爬。 **社交情感**：让更多的孩子坐在一起，共同分享。



Sturdy, middle rung

身体素质：the bounce develops the sense of balance, which is important for skills such as sitting still. The upper body muscles are trained when hanging from the arms. Bone density is developed when jumping down. **社交情感**：many children can stand or sit on the rung together, cooperating and feeling the movements of the other children moving. This develops consideration and cooperation.




Bouncy net meshes

身体素质：在网中弹跳、攀爬和坐下时，孩子们的敏捷性、平衡和协调能力以及空间意识都得到了提高。孩子们在向下跳时，可以锻炼手臂、腿部和核心部位的肌肉力量，并增强骨密度。 **社交情感**：弹跳、摇摆的网培养为他人考虑与合作意识。 **认知能力**：培养身体记忆、逻辑思维、注意力。



Long tube slide

身体素质：玩滑梯可以训练空间意识和平衡感。 **社交情感**：高度带来了刺激的速度和快感。通过轮流玩耍和为他人着想来激发同理心。停在超长滑道口时可获得安全感。



Crows nest

身体素质：在高处可以培养空间感和平衡感。 **社交情感**：将高处作为目的地和聚会点，不仅能增加社交互动，还能带来快感和欣赏美景。

Treasure Island

COR10430




直径大于等于 19mm 的 Corocord 绳索是特殊的“大力神”型镀锌六股钢丝。每根丝束都用 PES 纱紧密包裹，然后将其融化到每根独立的丝束上。这些绳索具有很高的耐磨性和防破坏性，可以根据需要在现场更换。



Corocord“S”扣在 Corocord 产品中作为通用连接。用特殊的液压机将带有圆形边缘的 8mm 不锈钢条压在绳索周围，使其成为理想的连接部件。其安全、耐用且防破坏，适用于攀爬网游戏中的典型游戏运动。



Corocord 软膜使用输送带质量的抗磨橡胶材料制成，具有出色的抗紫外线性。经过测试并符合 PAH 的 REACH 要求。内嵌物为聚酯编织物制成的四层铠装。铠装层和两个表面层的总厚度为 7.5 mm。

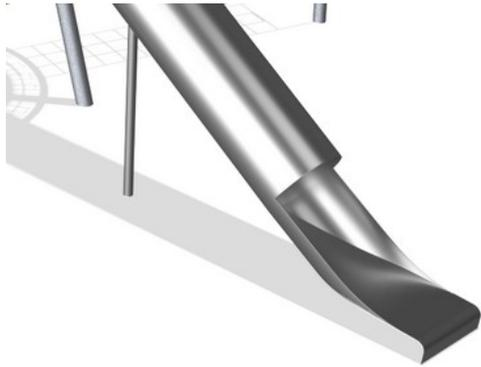

不锈钢组件由符合全球游乐场标准的优质不锈钢制成。钢材在制造后经过玻璃喷砂处理，以确保滑梯表面光滑。



钢结构的内部和外部均使用无铅热浸镀锌。镀锌在外部环境中具有出色的耐腐蚀性，并且维护成本低。

产品编号 COR104301-1005

安装信息

最大跌落高度	225 cm
安全面积	120.8 m ²
安装总时长	85.8
开挖量	17.28 m ³
混凝土使用量	10.37 m ³
标准入地深度	100 cm
运输重量	2,795 kg
固定选项	入地 ✓


质保信息

Corocord 绳索	10 年
镀锌钢结构	终身质保
橡胶软膜	2 年
S 扣	10 年
承保零部件	10 年



Sustainability Data

COR10430

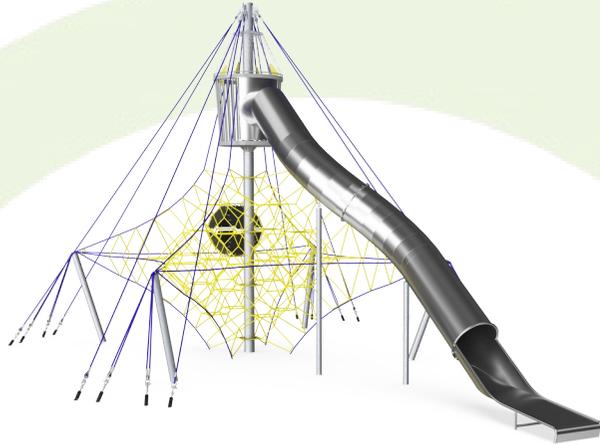

从原材料到成品	CO ₂ 排放总量	CO ₂ 排放量 / 千克	回收的原料
	kg CO ₂ e	kg CO ₂ e/kg	%
COR104301-1005	8,085.25	3.27	46.08

这些因素采用的总体框架为环保产品声明 (EPD), 该声明可量化“产品生命周期的环保信息, 并对相同功能的产品进行对比” (ISO, 2006)。在遵循该框架的同时, 对从原材料到制造的整个产品阶段 (A1-A3) 应用生命周期评估法。

Kompan A/S
C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





Treasure Island

COR10430

最大跌落高度 | 总高度 | 安全区域

最大跌落高度 | 总高度

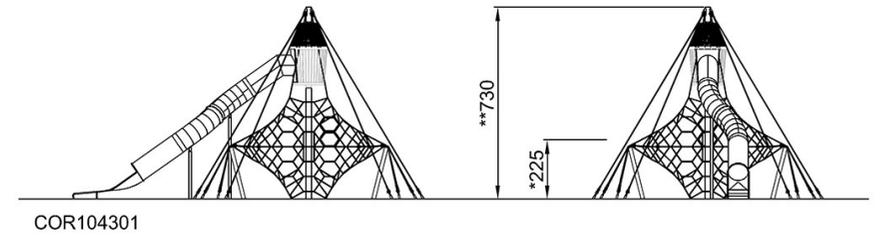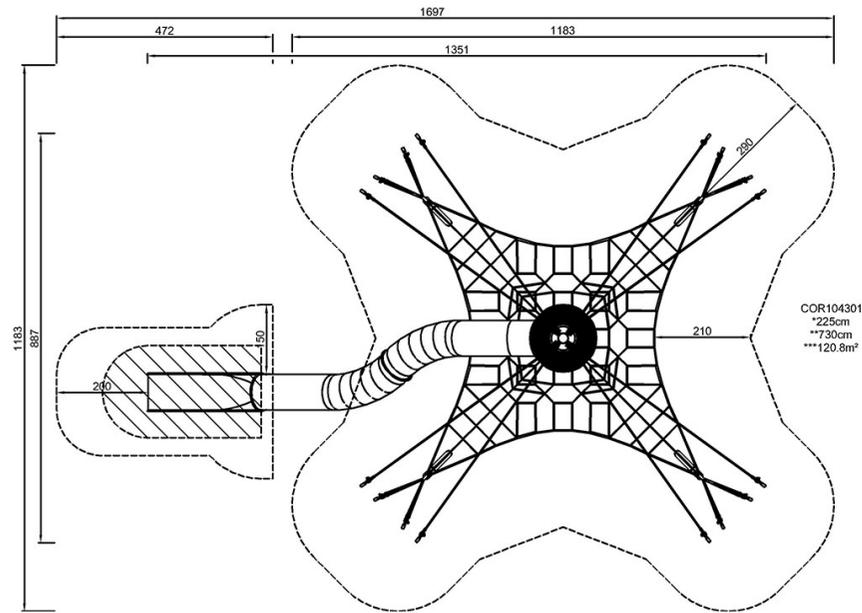

[点击查看俯视图](#)

[点击查看侧面图](#)