



# Super Spacenet 58

COR34581

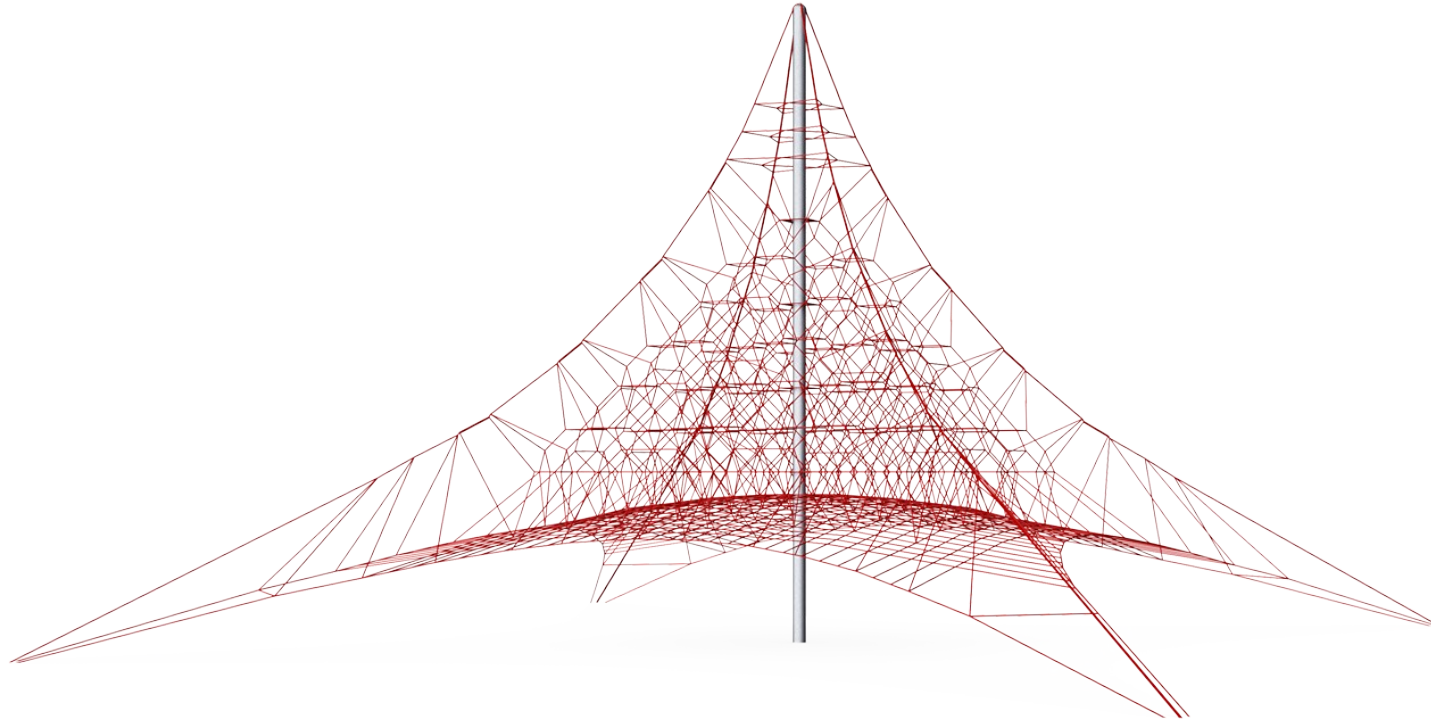


Item no. COR345811-1401	
<b>General Product Information</b>	
Dimensions LxWxH	2241x2241x1300 cm
Age group	8+
Play capacity (users)	189
Color options	

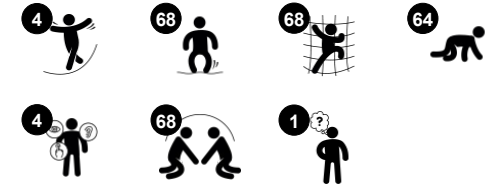

13 meters of bouncy, swaying climbing. WOW! The Super Spacenet 58 attracts children again and again with its fantastic bouncy climbs and views. The enormous horizontal net at the bottom of the Super Spacenet is a great point for resting or crawling across, communicating with ground level players. Heaps of children can climb to the top at the same time. The

movements of all climbers are reflected in the sway and bounce of the net, making this a unique shared play experience, uniting children. Arm, core and leg muscles get good training. Social skills such as empathy and helping others are trained manifestly, when children climb together. Apart from the holistic climbing experience, the Super Spacenet

attracts and welcomes users from a very wide age span. Whole families can climb together, having fun in shared play.

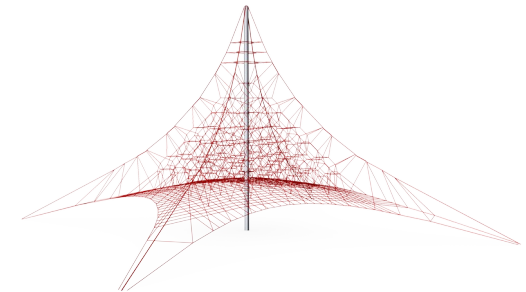

# Super Spacenet 58

COR34581



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear- and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope structures.



Huge spacenet structures are secured to the foundation with a system of three turnbuckles. Horizontal and vertical edge cables are fixed to individual turnbuckles, which then connect to individual steel anchors. This system ensures that each edge cable can be tensioned separately and increases structural safety by way of independent anchoring.

Item no. COR345811-1401	
Installation Information	
Max. fall height	300 cm
Safety surfacing area	475.2 m <sup>2</sup>
Total installation time	45.8
Excavation volume	50.06 m <sup>3</sup>
Concrete volume	35.40 m <sup>3</sup>
Footing depth (standard)	140 cm
Shipment weight	4,675 kg
Anchoring options	In-ground ✓



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.



# Sustainability Data

COR34581

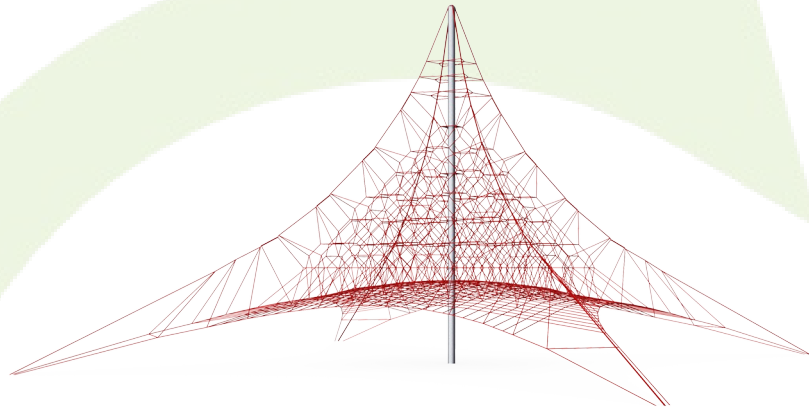


Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>COR345811-1401</b>	0.00	0.00	0.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000




# Super Spacenet 58


COR34581

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

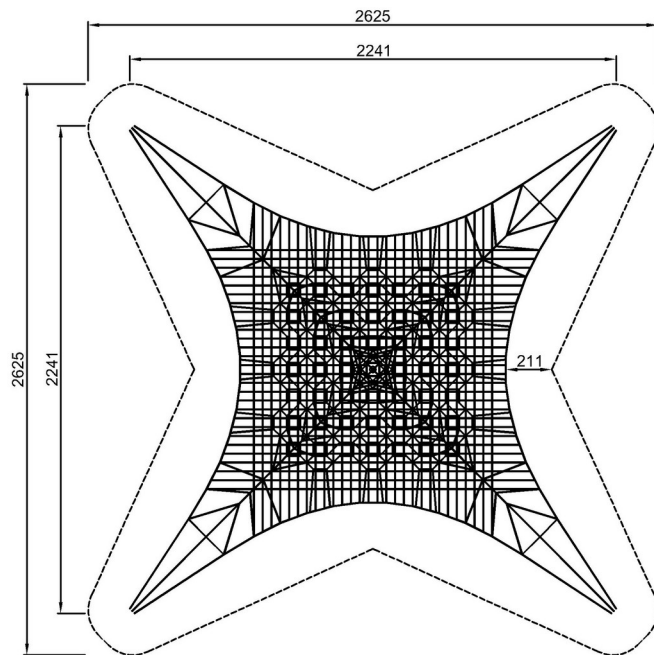

COR345811  
\*300cm  
\*\*1300cm  
\*\*\*475.2m<sup>2</sup>

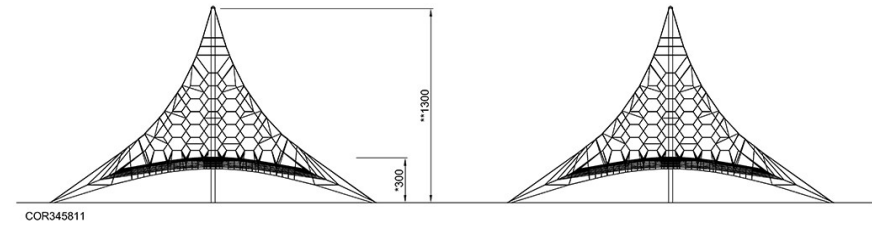

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)