
COR43401



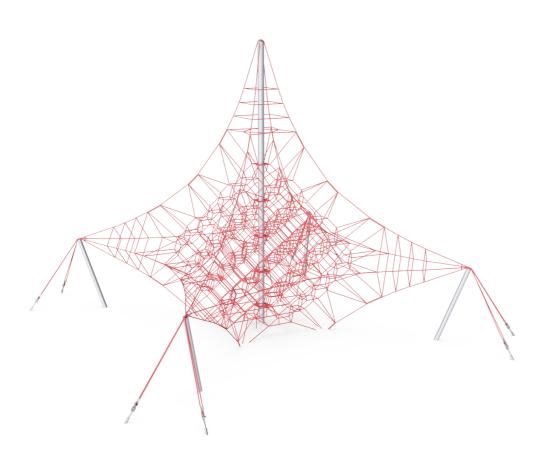

Item no. COR434011-1001

General Product Information

Dimensions LxWxH 900x900x870 cm

Age group 5+

Play capacity (users) 82


Colour options



The Octa Net Large promotes thrill, socialising, and physical development. Children will spend a good amount of time exploring the ways they can move their bodies, stretching and climbing on and around the structure. The carefully designed features support the development of physical skills such as agility, balance and coordination as well as spatial awareness

when climbing and sitting in the net. The careful design of the nets is scaled to the size of children in this age group, maximizing their play experience, and encouraging children to stay and play longer. In addition to the physical benefits, this is an incredibly enjoyable social space due to the transparent design. This will attract children and their parents creating a

space for healthy family fun, promoting healthy living through play.



COR43401










Highest rungs

Physical: spatial awareness is supported, arm muscles when holding tight. Social-Emotional: children develop courage, self-confidence, consideration and turn-taking, all important life skills.

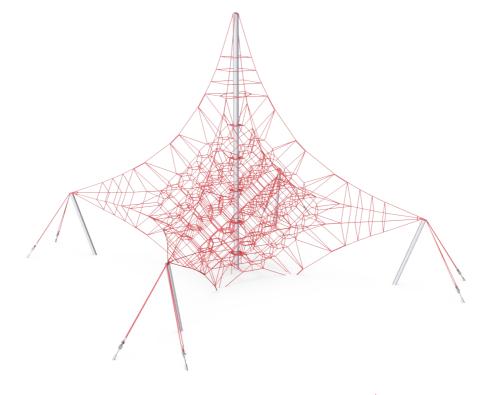



Big meshes

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Social-Emotional: allow more children being seated together, sharing.







Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. Social-Emotional: children develop courage and self-regulation when climbing up high. This positively affects self-confidence.



Transparency

Social-Emotional: the transparency makes cooperation and communication possible, which are essential life skills for children to learn.



Bouncy net meshes

concentration.



Physical: agility, balance and coordination as

well as spatial awareness are supported when

bouncing, climbing and sitting in the net.

Social-Emotional: the bouncing, swaying

Cognitive: physical memory, logical thinking,

net appeals to empathy and cooperation.









Sturdy, lower rungs

Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Social-Emotional: great meeting point allowing socialising.



COR43401



260 cm

43.9

194.1 m²

20.80 m³

12.48 m³

100 cm

1,741 kg

In-ground



Corocord ropes with 19mm+ diameter are known as a 'Hercules' rope type which is formed from galvanised six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. Ropes are highly wear-and vandalism-resistant and can be easily replaced on-site if needed.



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, to provide the best possible rope climbing experience.



Warranty Information Corocord (Hercules) 10 years Rope Membrane 2 years S-Clamps 10 years Spare Parts Guarantee 10 years Steel post HDG Lifetime

Item no. COR434011-1001 **Installation Information**

Max. fall height

Safety surfacing area

Total installation time

Footing depth (standard)

Excavation volume

Concrete volume

Shipment weight

Anchoring options



Corocord membranes consist of friction-proof rubberised material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast which is made of high-quality seamless steel and creates an oscillating support structure which is statically favourable and equalises the oscillations in the net. The masts are hot-dip galvanised as standard, with the design option of additional powder coating.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.

Sustainability Data

COR43401



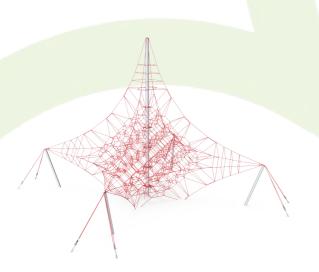

Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR434011-1001	4,851.69	3.07	54.36

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

200ml

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


COR43401



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

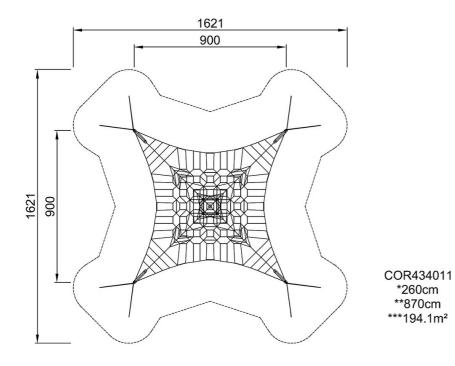

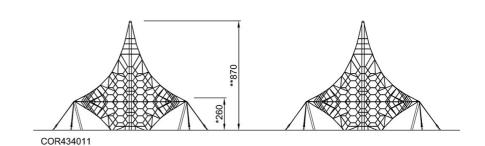

Click to see TOP VIEW

Click to see SIDE VIEW