


CRP250901





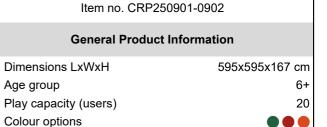

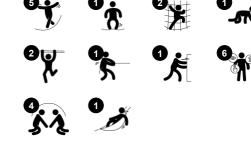

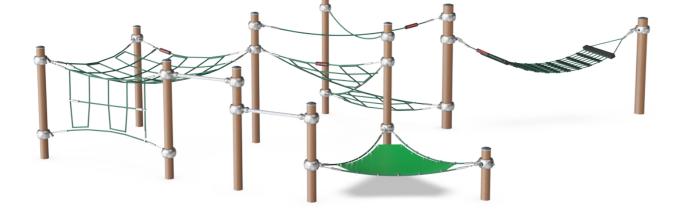

The Roloway Trail is a hugely appealing play piece that will attract children again and again. The varied climb, crawl and bounce activities invite a wide age span of children, thrilling their agility, cross-coordination and balance skills. These motor skills are fundamental in children's ability to navigate the world with body confidence, e.g. navigating street traffic

securely. Elements such as the Rope Hammock and the Triangular Membrane serve as spacious, swaying, bouncy meeting points that invite children to rest, socialise and be inspired by others for more fun and challenging physical play. This makes the Roloway Trail a highly versatile play piece that offers play fundaments for both physical and socialemotional life skills.



CRP250901










### Membrane

Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. Social-Emotional: great point for a break or meeting with friends.

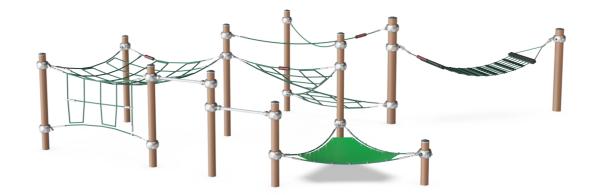



Triangular net Social-Emotional: the net allows for more children being seated or lying together, sharing.







### Quadrangle amusement net

Physical: the inclined net supports the upward climbing movement of the body. Children develop cross-body coordination and muscle strength. Social-Emotional: the big net allows for more children being seated or lying together, sharing.







#### Hammock bed

Physical: swaying trains the sense of balance and spatial awareness, important for judging distances and navigating space. Social-Emotional: swaying, sharing and meeting with groups of friends. Trains turn-taking skills







Physical: develop balance, spatial awareness, core, arm and leg muscles, when climbing up and hanging. Social-Emotional: meeting, socialising and turn-taking when climbing up and down via bar.

CRP250901



10 years

10 years

10 years




Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.




Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.

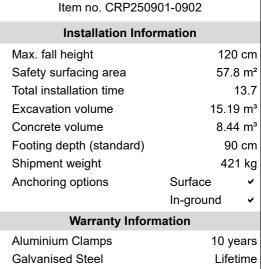




Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

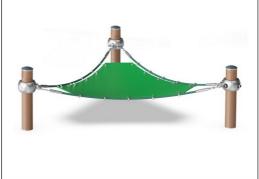

Corocord membranes consist of friction-proof rubberised material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.

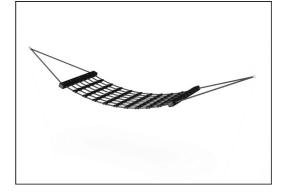

The hammock is made of steel reinforced single braided 16 mm PES ropes. PES has high strength with excellent resistance to abrasion and UV radiation. The rope loops are connected by nylon (PA6) connectors providing a smooth and comfortable hammock.



Painted Toplayer


Spare Parts Guarantee

Ropes & Nets

## **Sustainability Data**

CRP250901



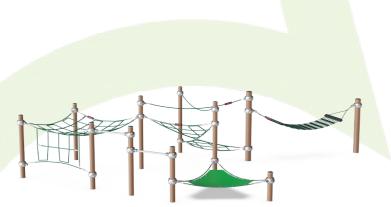

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
CRP250901-0902	1,274.89	3.81	41.54

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





CRP250901



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

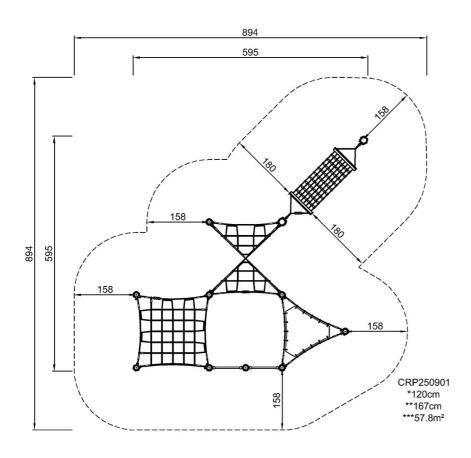



Click to see TOP VIEW

Click to see SIDE VIEW