Balance Beam

FSW215



Item no. FSW21500-0900		
General Product Information		
Dimensions LxWxH	533x317x45 cm	
Age group	13+	
Play capacity (users)	3	
Colour options		





In addition to running, jumping, climbing, crawling, balancing should always be a part of a challenging obstacle course. The balance beam is divided into three sections with increasing degrees of difficulty. The real dare devils can make the exercises even more difficult by balancing backwards. The surface of the Balance Beam is made from Ekogrip® panels with a top-layer of thermoplastic rubber, this has a non-skid effect for comfortable and safe training at all weather circumstances.

Balance Beam


FSW215






Post are made of Ø101.6 x 2mm, pregalvanized carbon steel and powder coated, a great protection to all conditions.







Item no.	FSW21500-0900

Installation Information

Max. fall height	40) cm
Safety surfacing area	25.	8 m²
Total installation time		3.7
Excavation volume	0.1	1 m³
Concrete volume	0.0	0 m³
Footing depth (standard)	90) cm
Shipment weight	10	5 kg
Anchoring options	In-ground	~
	Surface	~

Warranty Information

Connectors	10 years
EcoCore HDPE	Lifetime
Hot dip galvanised steel	Lifetime
Post	10 years
Spare parts guaranteed	10 years



All KOMPAN fitness products are compliant with the ASTM F3101 & EN16630 Outdoor Fitness Standards. Load tests are performed as a static test by adding dynamic factors as well as safety factors to the specified load of 78kg per user. A product intended for 1 user is loaded with 420kg. Processor of the second second

The information sign is made of a PA6 (Polyamide) and shows the most relevant exercise and a QR code. When scanned the QR code will link to an animated illustration of the exercise and offers the possibility of downloading the KOMPAN sport & fitness App, which will provide a large amount of exercises and workouts.



All decks are made of High Pressure Laminate HPL with a thickness 17.8mm and non skid surface texture according to EN 438-6. KOMPAN HPL has high wearing strength to ensure long lifetime in all climates.



Sustainability Data

Cradle to Gate A1-A3

FSW21500-0900

FSW215



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

216.43

CO2e/kg

kg CO₂e/kg

3.18

Recycled


materials

%


42.38


Balance Beam

FSW215



* Max fall height | ** Total height

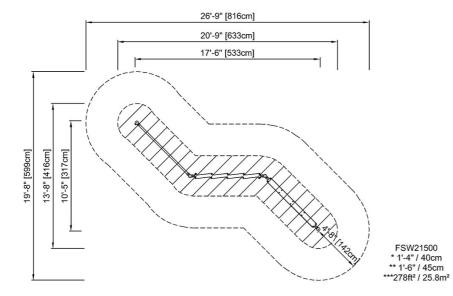

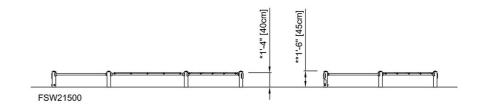

Click to see TOP VIEW



