



Large Hexagonal Spacenet

COR36501

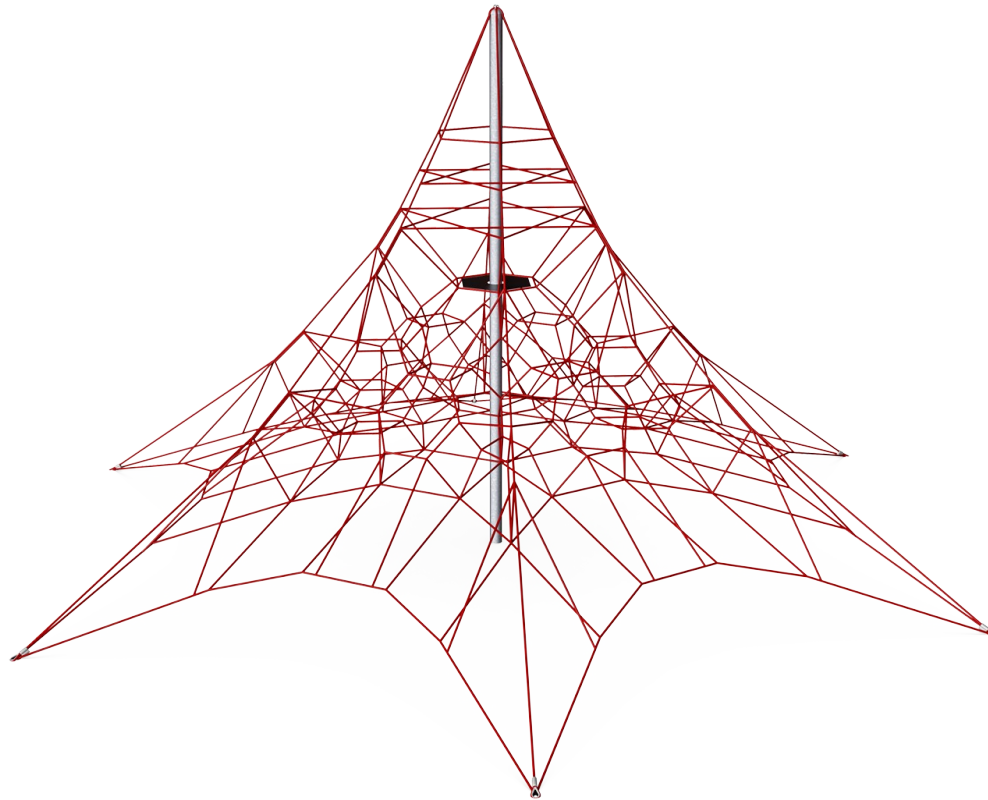


Item no. COR365011-1101	
General Product Information	
Dimensions LxWxH	1111x963x589 cm
Age group	5+
Play capacity (users)	49
Color options	

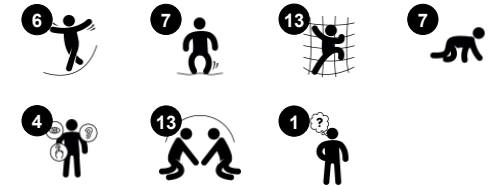

The Large Hexagonal Spacenet appeals immensely to children's need for adventure. With its 5m climb to the top, it is bound to attract children time and time again. The ropes sway gently, adding to the development of important motor skills such as cross-coordination and sense of space. These are important in for example judging distances

when navigating traffic. The muscles are put to work, and legs, arms and core are trained when climbing and mastering one level after the next. The challenge of climbing this high trains children's risk-taking skills as well as their social skills, such as for instance empathy: with many children climbing the swaying rungs, consideration of others is

needed. The Large Hexagonal Spacenet is a great meeting point. Thanks to the transparency they can communicate, compare and play across the net.

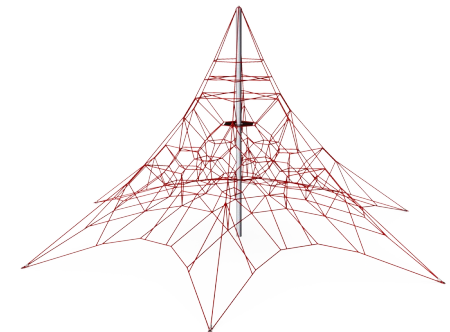

Large Hexagonal Spacenet

COR36501



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.



Through KOMPAN Variant Team, you can choose between additional 7 rope colours and customize your solution. The assortment is a wide span of colours ranking from elegant and expressive black or natural and toned-down hemp colour, to a range of attractive and eye-catching signal colours.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.

Item no. COR365011-1101	
Installation Information	
Max. fall height	165 cm
Safety surfacing area	118.8 m ²
Total installation time	19.9
Excavation volume	11.23 m ³
Concrete volume	7.15 m ³
Footing depth (standard)	110 cm
Shipment weight	752 kg
Anchoring options	In-ground ✓



Sustainability Data

COR36501

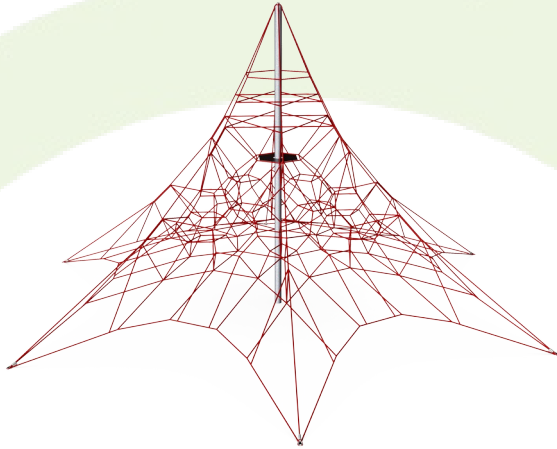

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR365011-1101	1,721.30	3.12	55.90

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Large Hexagonal Spacenet

COR36501

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

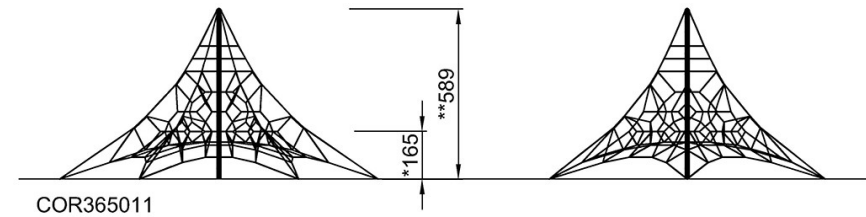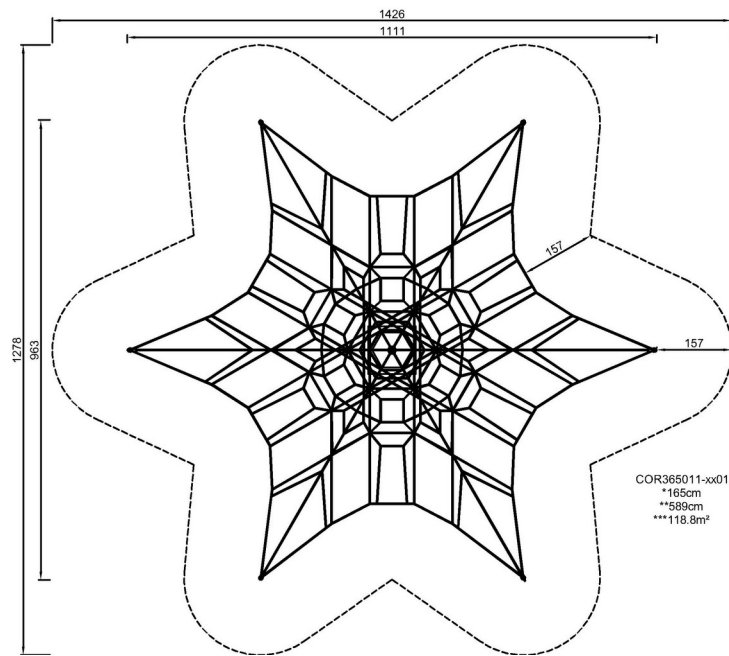

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)