
BASIC353



Item no. BASIC353-3418P		
General Product Information		
Dimensions LxWxH	65x319x198 cm	
Age group	2+	
Play capacity (users)	2	
Colour options		



Sliding is a favorite playground activity that attracts children to being active and playful in a thrilling way. This sturdy slide will delight children and encourage them to be brave and enthusiastic on the playground, for hours of imaginative and active play. When children slide they train their core muscles, sitting upright while sliding down. This stimulates their trunk stability, important for avoiding back and neck pains – a growing problem in children due to sedentary lifestyles. Sliding additionally train the child's sense of balance and spatial understanding. These skills are important in navigating the world securely. They are the fundament of all motor skills and thus a fundament in physical confidence in the child. The steps of the stair are great for little knees and hands with their PUR cover. adding a feeling of confidence to the climb.

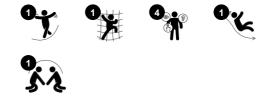



BASIC353







#### Slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.




#### Stair ladder

**Physical:** cross coordination is used, supporting the cooperation of the left and right halves of the brain, which is necessary for reading. For young children, spatial awareness is trained when walking stairs.

BASIC353




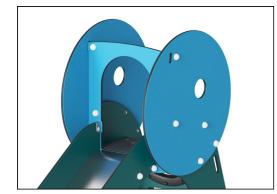

Panels of 19mm EcoCore<sup>™</sup>. EcoCore<sup>™</sup> is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The stainless steel components are made of high quality stainless steel in compliance with global playground standards. The steel is glass blasted after manufacturing to ensure a smooth gliding surface.



Steps are made of PUR. It retains its properties in the temperature range of -30°C to 60°C. Material is UV stabilised.

Item no. BASIC353-3418P		
Installation Information		
Max. fall height	12	0 cm
Safety surfacing area	18.	8 m²
Total installation time		5.9
Excavation volume	0.18 m³	
Concrete volume	0.00 m³	
Footing depth (standard)	60 cm	
Shipment weight	15	i3 kg
Anchoring options	In-ground	~
	Surface	~
Warranty Information		
EcoCore HDPE	Lifetime	
PUR components	10 years	
Spare parts guaranteed	10 years	
Stainless steel slide	10 y	ears



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor such as EcoCoreTM panels of +95% post consumer recycled ocean waste.



# **Sustainability Data**

Cradle to Gate A1-A3

BASIC353-3418P

. . .

BASIC353



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



#### Data version no. 2023-10-05

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

#### mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000

BUREAU VERITAS

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

195.85

CO2e/kg

kg CO<sub>2</sub>e/kg

1.61

Recycled


materials


%


76.95

BASIC353





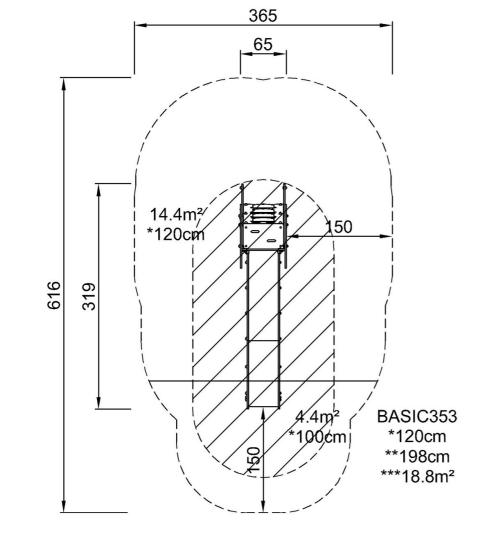

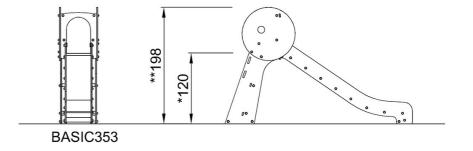

\* Max fall height | \*\* Total height

Click to see TOP VIEW

Click to see SIDE VIEW