



Dragite Dragonite

COR10494

Item no. COR104941-0401

General Product Information

Dimensions LxWxH	437x637x436 cm
Age group	3+
Play capacity (users)	45
Color options	

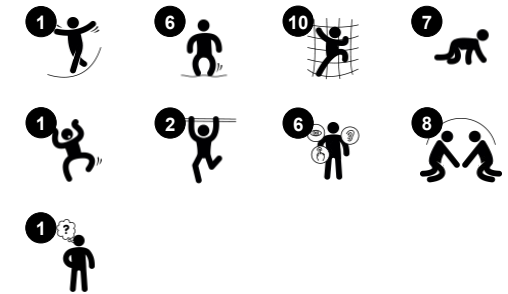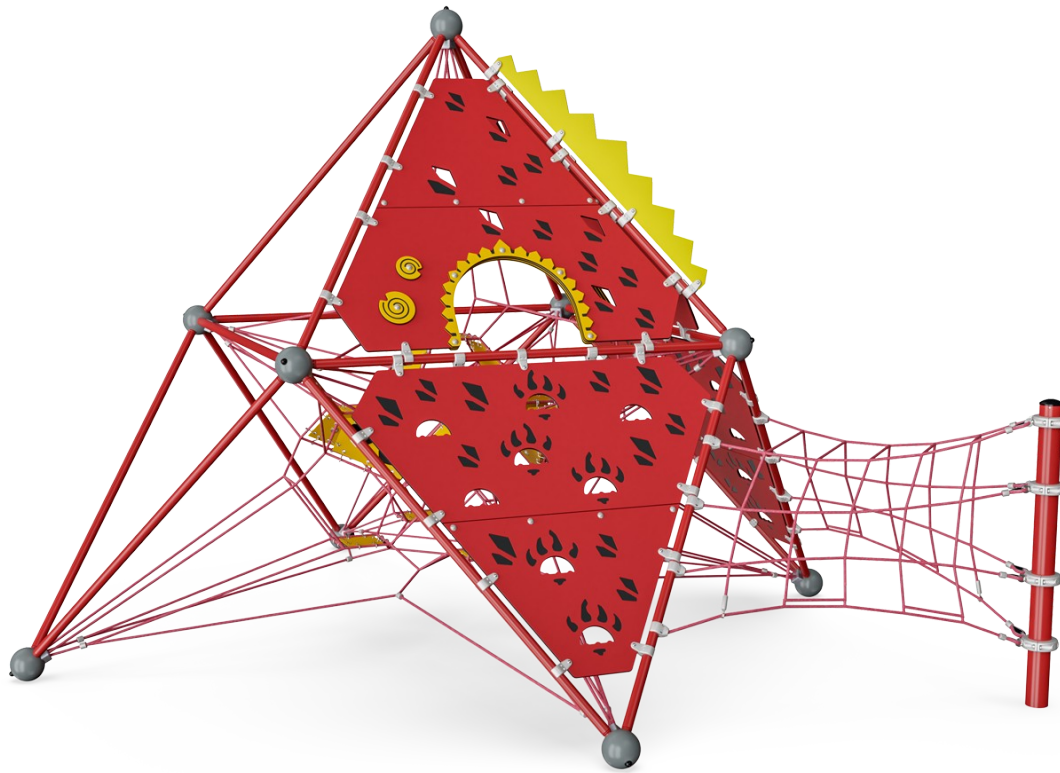


The impressive Dragite Dragonite attracts attention with its vibrant colours and whimsical details. The richness in play variation makes children play for a long time. The graded challenges in climbing enhances play experience and play outcome. The Dragite in short make children want to come back again and again. The bouncy inter-connected nets

and membranes make everything move when children climb. This trains concentration and muscles as children hold tight when climbing up high. The height also trains spatial awareness. The climbing walls add variation to climbing. They create a front and back of the structure and facilitate rules play, e.g. hide and seek. The net tail makes a fine retraction point

for quieter exchanges with friends. The play benefit of the Dragite is thrill: a collective climbing experience that trains the proprioception: the anti-spin tool of the body!

Dragite Dragonite


COR10494

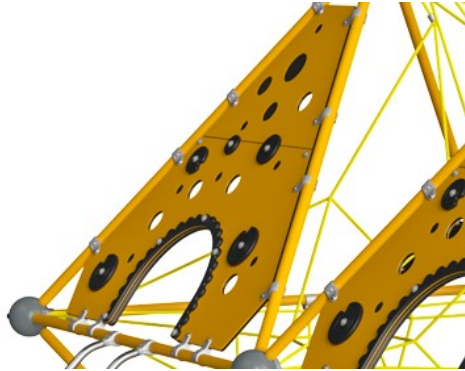

Panel of 19mm EcoCore™ HDPE. This highly durable, eco-friendly material is not only recyclable after use, but also consists of a core produced from 100% recycled material.




Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

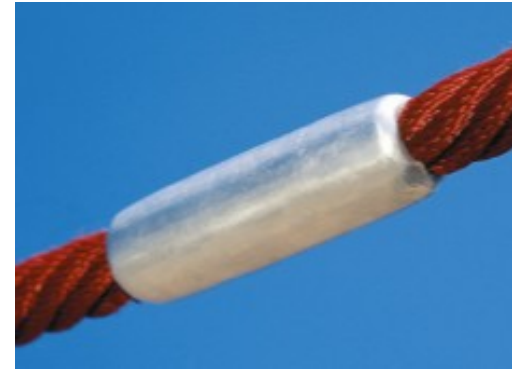

The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.


Item no. COR104941-0401	
Installation Information	
Max. fall height	230 cm
Safety surfacing area	63.4 m ²
Total installation time	39.4
Excavation volume	3.35 m ³
Concrete volume	1.99 m ³
Footing depth (standard)	110 cm
Shipment weight	1,110 kg
Anchoring options	In-ground ✓

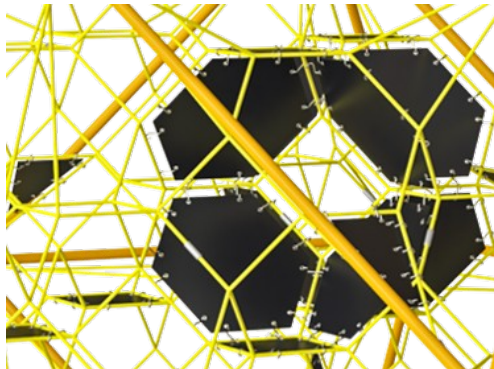

Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.



The metal parts are made of high quality steel, hot dip galvanised inside and outside with leadfree zinc. On the outside, there is an additional layer of powder coating. This ensures both excellent corrosion resistance and colourful design expression.

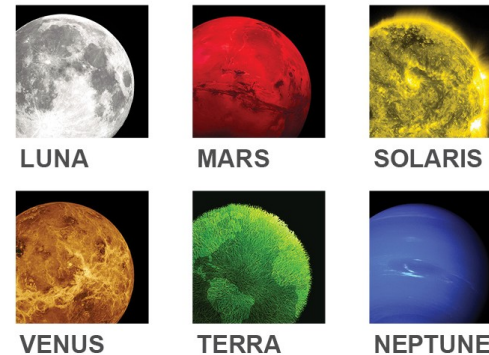


The COROCORD Frame Nets are available in 6 galactic colour themes. The themes draw on bright colours that appeal to children of all ages. Can be changed in the configurator.



Sustainability Data

COR10494

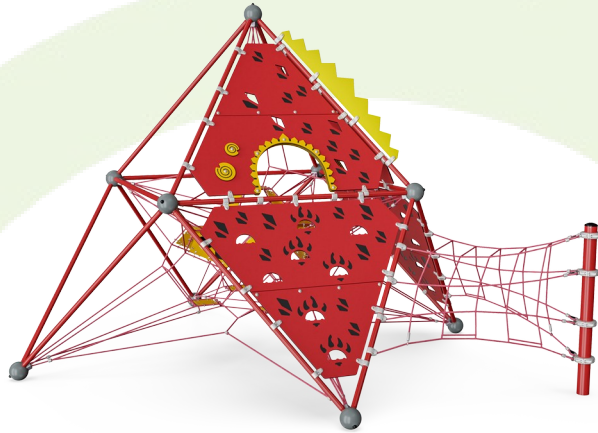

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR104941-0401	2,357.40	2.98	55.70

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Dragite Dragonite

COR10494

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

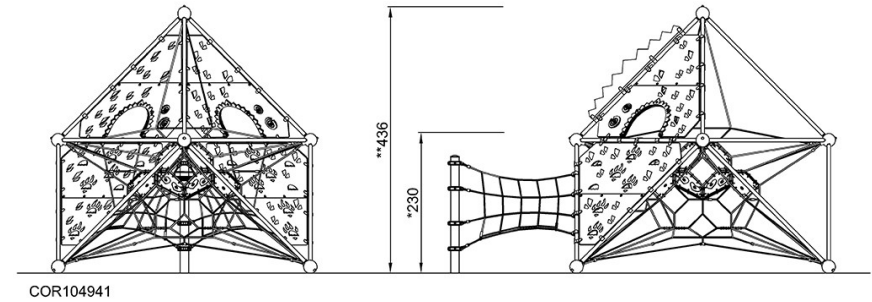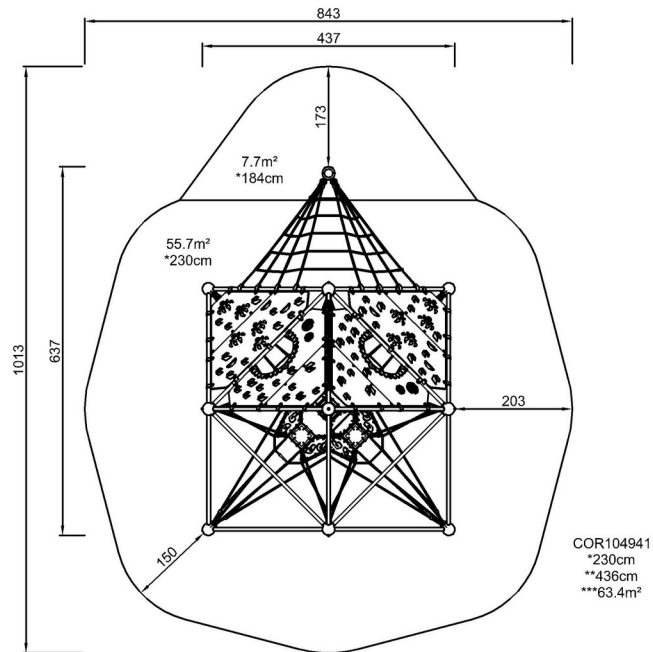

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)